


## BIFACIAL HJT MONO CRYSTALLINE HALF CUT MODULE – DOUBLE GLASS

460 / 465 / 470 / 475 / 480 Watts

### Lion Series



### Overview

Hetero Junction (HJT) photovoltaic module is a Ground breaking Technology. HJT technology guarantees high performance and low degradation of the PV module, substantially improving the results and the yield in the time. "Lion" Series module is the ideal solution for end users who want a Quality PV & reliable product over time and a fast turnaround on their investments.

### Key Benefits

	Anti-PID & LID Technology		30 Years Limited Product Warranty
	Higher yield per surface area		Low Pmax at -0,24 % / °C
	Low LCOE		Higher Light Conversion



Guaranteed mechanical resistance to severe weather conditions



Positive Tolerance




100 % electro-luminescence tested

### Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE Fire safety Class C according to UL790
Insurance	Third party liability insurance provided by Liberty Mutual
Wind and Snow Loads Testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Power Tolerance	Guaranteed +0/+5W (STC condition)
Warranties	<ul style="list-style-type: none"> <li>• 30-year limited product warranty</li> <li>• 15-year manufacturer warranty on 95.0% of the nominal performance</li> <li>• 30-year transferable linear power output warranty</li> </ul>

### Linear Performance Warranty

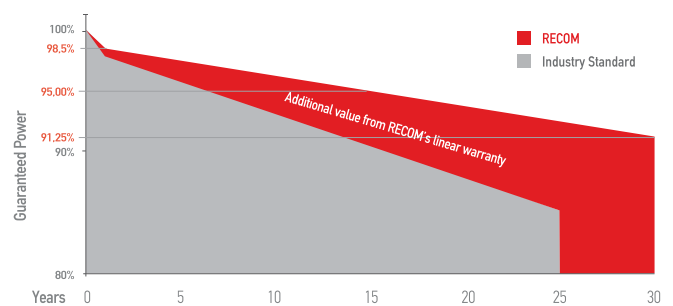

First Year Output  $\geq 98.5\%$     2-30 Year Decline  $\leq 0.25\%$     30 Year Output  $\geq 91.25\%$

# Lion

## BIFACIAL HJT MONO CRYSTALLINE HALF CUT MODULE – DOUBLE GLASS

RCM-xxx-6DBHF (xxx=460-480)

### Electrical Characteristics

POWER CLASS <sup>(1)</sup>			460		465		470		475		480	
Testing Condition			STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power	Pmax	[Wp]	460	353,4	465	357,1	470	360,9	475	364,6	480	368,8
Maximum Power Voltage	Vmp	[V]	45,24	43,39	45,44	43,59	45,66	43,80	45,86	43,99	46,08	44,20
Maximum Power Current	Imp	[A]	10,18	8,14	10,24	8,19	10,30	8,24	10,36	8,29	10,43	8,34
Open Circuit Voltage	Voc	[V]	53,22	50,72	53,35	50,84	53,48	50,97	53,61	51,09	53,74	51,21
Short Circuit Current	Isc	[A]	10,58	8,53	10,64	8,58	10,70	8,63	10,76	8,68	10,82	8,73
Module Efficiency	Eff	[%]	21,2%		21,4%		21,6%		21,9%		22,1%	
Maximum Series Fuse	Ir	[A]	20									
Maximum System Voltage	Vsys	[V]	1500V DC (IEC)									

(1) Measurement Tolerances: Pmax (± 3%), Isc & Voc (± 3%) - Power Classification 0/+5W

(2) STC (Standard Testing Condition): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM 1.5

(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m<sup>2</sup>, NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

### Bi Facial Output (4)


POWER CLASS			460		465		470		475		480			
Power with Backside Gain			Pmax [Wp]	Eff [%]	Pmax [Wp]	Eff [%]	Pmax [Wp]	Eff [%]	Pmax [Wp]	Eff [%]	Pmax [Wp]	Eff [%]		
			+5	[%]	483,0	22,2%	488,3	22,5%	493,5	22,7%	498,8	22,9%	504,0	23,2%
			+10	[%]	506,0	23,3%	511,5	23,5%	517,0	23,8%	522,5	24,0%	528,0	24,3%
			+15	[%]	529,0	24,3%	534,8	24,6%	540,5	24,9%	546,3	25,1%	552,0	25,4%
			+20	[%]	552,0	25,4%	558,0	25,7%	564,0	25,9%	570,0	26,2%	576,0	26,5%
			+25	[%]	575,0	26,5%	581,3	26,7%	587,5	27,0%	593,8	27,3%	600,0	27,6%
			+30	[%]	598,0	27,5%	604,5	27,8%	611,0	28,1%	617,5	28,4%	624,0	28,7%

(4) Bifaciality Factor > 90% - Back-side power gain depends upon the specific project albedo - Efficiency is according to the surface of the module

### Mechanical Data

Dimensions	2094 mm x 1038 mm x 30 mm
Weight	27,5 Kg
Cell Type	HJT - 166mm x 83mm (2 x 72 Pcs) - M6
Front Glass	2.0 mm Tempered and low iron glass + ARC
Rear Side	2.0 mm Tempered and low iron glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass diodes
Connector	Genuine MC4 Evo2, or MC4 compatible
Output cable	4mm <sup>2</sup> - Length = 200mm or customized

### Dimensions

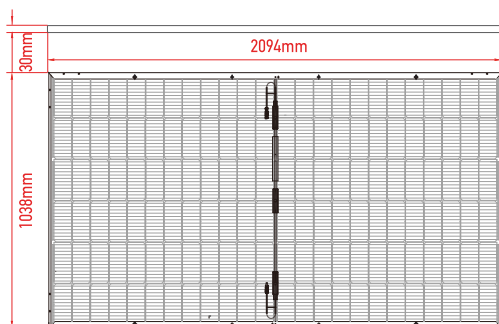


RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

[www.recom-tech.com](http://www.recom-tech.com)

### I-V Curve

The module relative power loss at low light irradiance of 200W/m<sup>2</sup> is less than 3%.

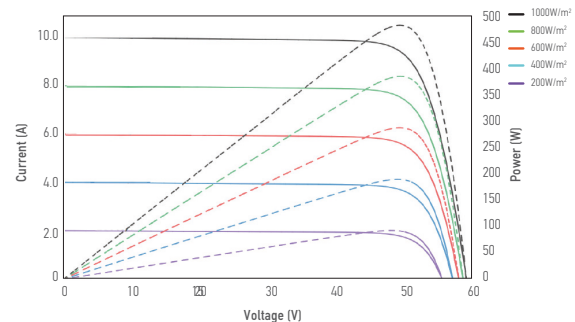

### Temperature Characteristics

Pmax Temperature Coefficient	-0.24% / °C
Voc Temperature Coefficient	-0.22% / °C
Isc Temperature Coefficient	+0.047% / °C
Operating Temperature	-40~+85 °C
Nominal Operating Module Temperature (NMOT)	42 ± 2 °C

### Packing Configuration

Container	40' HC
Pieces per Pallet	36
Pallets per Container	22
Pieces per Container	(36+36)x11=792 pcs

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, RECOM Technologies reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Please read the safety and installation instructions before using the modules.